


BC847VPN

Dual NPN+PNP Small Signal Transistor

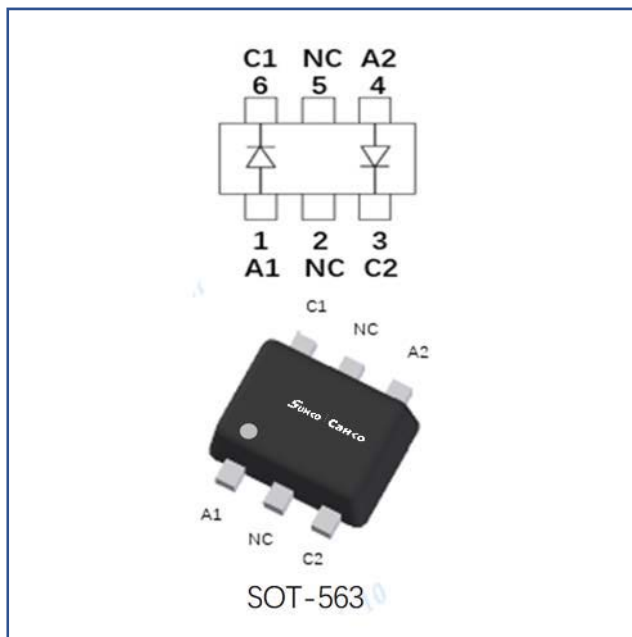

Features

- Moisture sensitivity level 1
- Halogen free and
- Surface mount package ideally suited for automatic Insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-563
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

TR1-NPN

Item	Symbol	Unit	Conditions	Value
Device marking code				7P
Collector-base voltage	V_{CBO}	V	$I_C=10\mu\text{A}, I_E=0$	50
Collector-emitter voltage	V_{CEO}	V	$I_C=10\text{mA}, I_B=0$	45
Emitter-base voltage	V_{EBO}	V	$I_E=1\mu\text{A}, I_C=0$	6
Collector current	I_C	mA		100
Power dissipation	P_D	mW		150
Junction temperature	T_J	$^{\circ}\text{C}$		-55 to +150
Storage temperature	T_{STG}	$^{\circ}\text{C}$		-55 to +150

BC847VPN

TR2-PNP

Item	Symbol	Unit	Conditions	Value
Collector-base voltage	V_{CBO}	V	$I_C = -10\mu A, I_E = 0$	-50
Collector-emitter voltage	V_{CEO}	V	$I_C = -10mA, I_B = 0$	-45
Emitter-base voltage	V_{EBO}	V	$I_E = -1\mu A, I_C = 0$	-5
Collector current	I_C	mA		-100
Power dissipation	P_D	mW		150
Junction temperature	T_J	°C		-55 to +150
Storage temperature	T_{STG}	°C		-55 to +150

■ Electrical Characteristics ($T_a = 25^\circ C$ Unless otherwise specified)

TR1-NPN

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = 10\mu A, I_E = 0$	50		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C = 10mA, I_B = 0$	45		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = 1\mu A, I_C = 0$	6		
Collector cut-off current	I_{CBO}	nA	$V_{CB} = 30V, I_B = 0$			15
Emitter-base cutoff current	I_{EBO}	nA	$V_{EB} = 5V, I_C = 0$			100
DC current gain	h_{FE}		$V_{CE} = 5V, I_C = 2mA$	200		450
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C = 10mA, I_B = 0.5mA$			0.25
	$V_{CE(sat)2}$	V	$I_C = 100mA, I_B = 5mA$			0.6
Base-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C = 10mA, I_B = 0.5mA$			1.05
	$V_{BE(sat)2}$	V	$I_C = 100mA, I_B = 5mA$			1.1
Base-emitter voltage	V_{BE1}	V	$V_{CE} = 5V, I_C = 2mA$			0.7
	V_{BE2}	V	$V_{CE} = 5V, I_C = 10mA$			0.72
Transition frequency	f_T	MHz	$V_{CE} = 5V, I_C = 10mA, f = 100MHz$	100		
Noise figure	N_F	dB	$V_{CE} = 5V, I_C = 0.2mA, f = 1kHz, R_g = 2K\Omega, \Delta f = 200Hz$			10

BC847VPN

TR2-PNP

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = -10\mu A, I_E = 0$	-50		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C = -10mA, I_B = 0$	-45		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = -1\mu A, I_C = 0$	-6		
Collector-base cut-off current	I_{CBO}	nA	$V_{CB} = -30V, I_E = 0$			-15
Emitter-base cut-off current	I_{EBO}	nA	$V_{EB} = -5V, I_C = 0$			-100
Dc current gain	h_{FE}		$V_{CE} = -5V, I_C = -2mA$	220		475
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C = -10mA, I_B = -0.5mA$			-0.3
	$V_{CE(sat)2}$	V	$I_C = -100mA, I_B = -5mA$			-0.65
Baser-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C = -10mA, I_B = -0.5mA$			-1
	$V_{BE(sat)2}$	V	$I_C = -100mA, I_B = -5mA$			-1
Base-emitter voltage	V_{BE1}	V	$V_{CE} = -5V, I_C = -2mA$			-0.75
	V_{BE2}	V	$V_{CE} = -5V, I_C = -10mA$			-0.82
Transition frequency	f_T	MHz	$V_{CE} = -5V, I_C = -10mA, f = 100MHz$	100		
Noise figure	N_F	dB	$V_{CE} = -5V, I_C = -0.2mA, f = 1kHz, R_g = 2K\Omega, \Delta f = 200Hz$			10

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J-A}^{(1)}$	$^{\circ}C/W$	833
Thermal resistance, junction-to-case	$R_{\theta J-C}^{(1)}$	$^{\circ}C/W$	667

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 25.4mm*25.4mm copper pad areas

BC847VPN

Characteristics

TR1-NPN

Fig 1: Static Characteristics

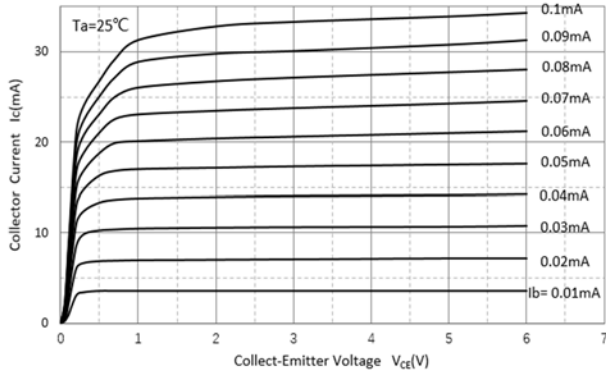


Fig 2: DC Current Gain Characteristics

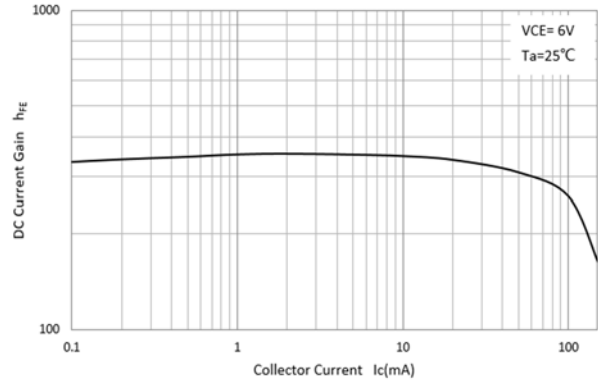


Fig 3: Collector-Emitter Saturation Voltage

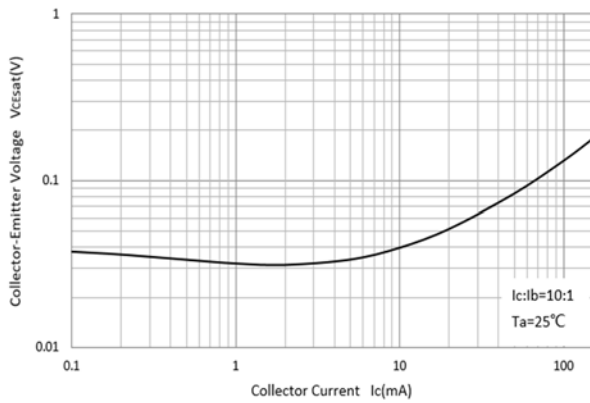


Fig 4: Base-Emitter Saturation Voltage

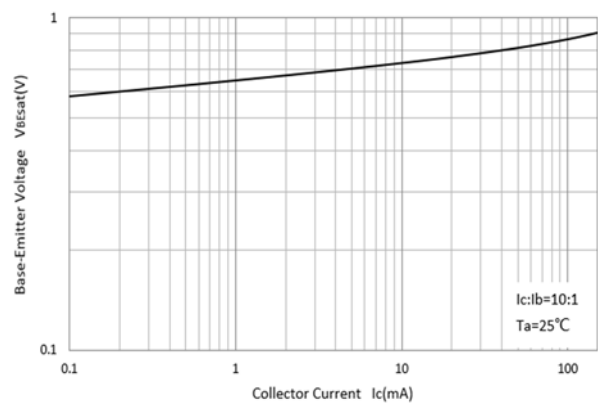


Fig 5: Base-Emitter On Voltage



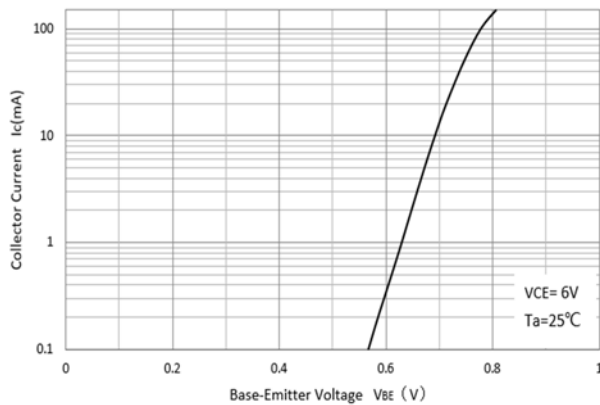


Fig 6: Cob/Cib-VCE/VBE

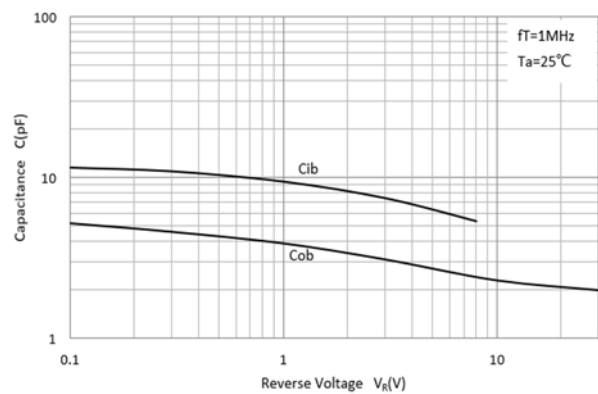

BC847VPN

Fig 7: P_D - T_a Curve

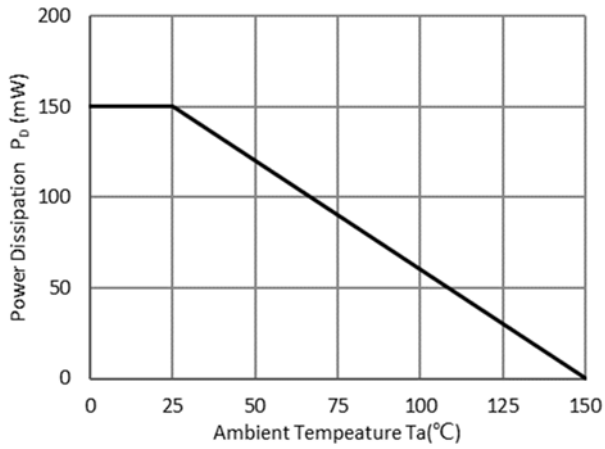

TR2-PNP

Fig 1: Static Characteristics

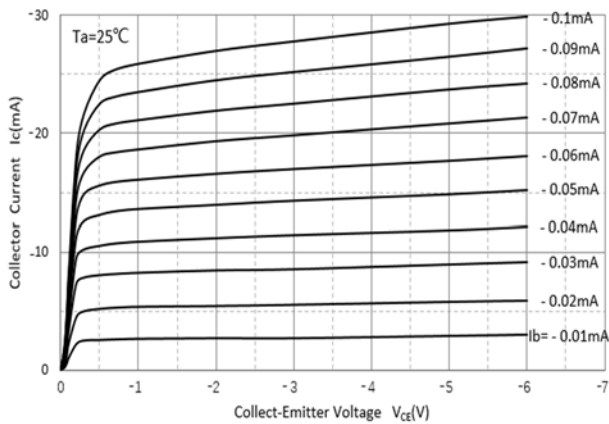


Fig 2: DC Current Gain Characteristics

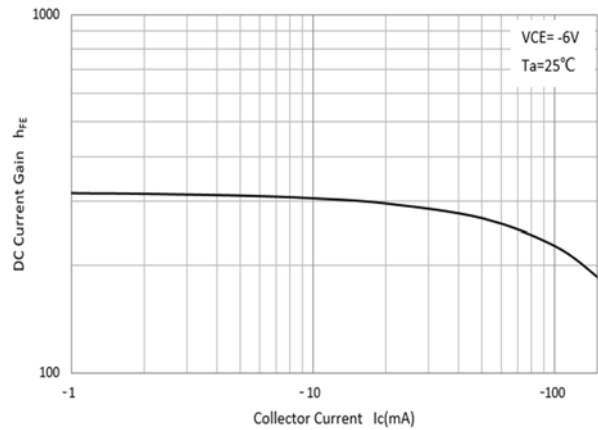


Fig 3: Collector-Emitter Saturation Voltage


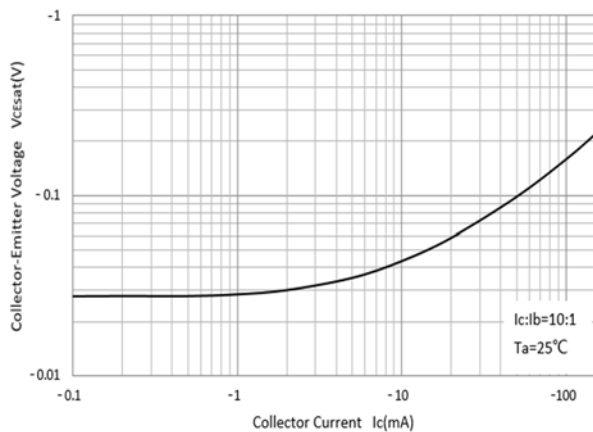


Fig 4: Base-Emitter Saturation Voltage

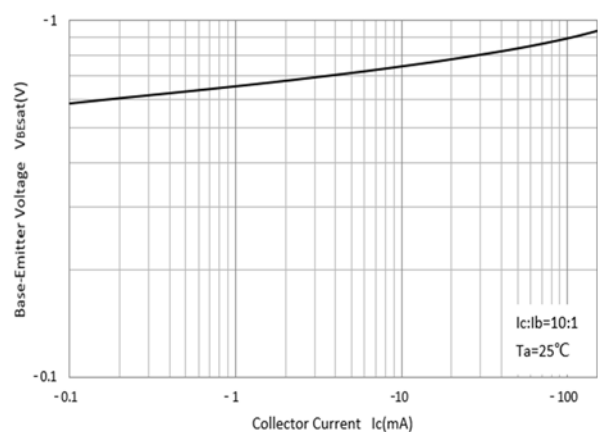

BC847VPN

Fig 5: Base-Emitter On Voltage

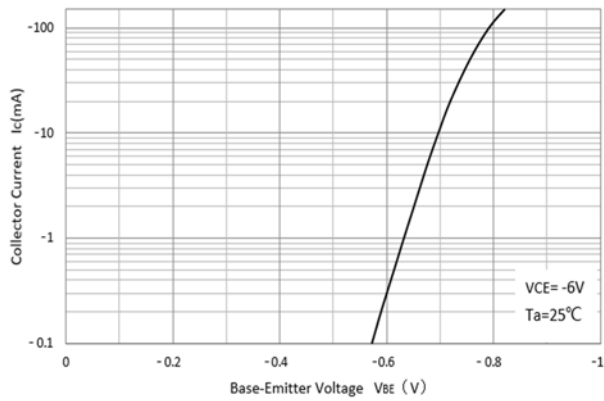


Fig 6: C_{ob}/C_{ib} - V_{CB}/V_{EB}


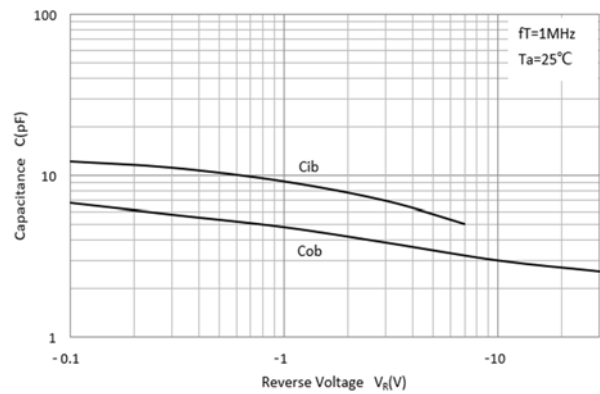


Fig 7: P_D - T_a Curve

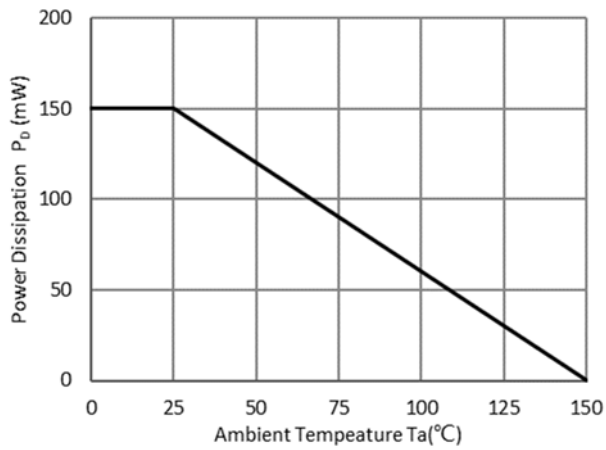


BC847VPN

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BC847VPN	F2	Approximate 0.0035	3000	30000	120000	7" reel

■ Outline Dimensions


SOT-563



TOP VIEW



SIDE VIEW




SIDE VIEW

DIMENSIONS

DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.006	0.011	0.150	0.300
B	0.043	0.051	1.100	1.300
C	0.059	0.067	1.500	1.700
D	0.016	0.024	0.400	0.600
G	0.035	0.043	0.900	1.100
H	0.059	0.067	1.500	1.700
K	0.021	0.026	0.550	0.650
L	0.004	0.011	0.100	0.300
M	0.004	0.007	0.100	0.180

■ Suggested Pad Layout

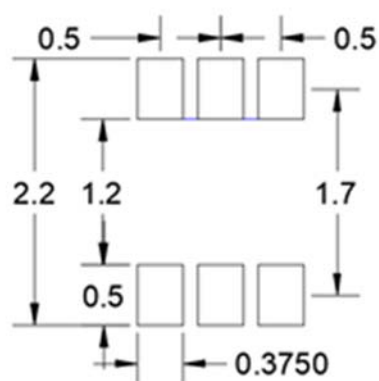

UNIT:mm

BC847VPN

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.