




N-Channel Enhancement Mode Field Effect Transistor



SOT-323

Product Summary

- V_{DS} 100V
- I_D 200mA
- $R_{DS(ON)}$ (at $V_{GS}=10V$) $<5.0\Omega$
- $R_{DS(ON)}$ (at $V_{GS}=4.5V$) $<5.5\Omega$

General Description

- Trench Power MV MOSFET technology
- Voltage controlled small signal switch
- High density cell design for low $R_{DS(ON)}$
- Fast Switching Speed

Applications

- Small servo motor control
- Power MOSFET gate drivers
- Switching application

■ Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-source Voltage	V_{DS}	100	V
Gate-source Voltage	V_{GS}	± 20	V
Drain Current	$T_A=25^\circ\text{C}$ @ Steady State	200	mA
	$T_A=70^\circ\text{C}$ @ Steady State	160	
Pulsed Drain Current ^A	I_{DM}	800	mA
Total Power Dissipation @ $T_A=25^\circ\text{C}$	P_D	150	mW
Thermal Resistance Junction-to-Ambient @ Steady State ^B	$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range	T_J, T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

■ Ordering Information

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BSS123W	F2	B123.	3000	30000	120000	7" reel

■ Electrical Characteristics (T_J=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D =250μA	100			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =100V, V _{GS} =0V			1	μA
Gate-Body Leakage Current	I _{GSS1}	V _{GS} = ±20V, V _{DS} =0V			± 100	nA
	I _{GSS2}	V _{GS} = ±10V, V _{DS} =0V			± 50	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =250μA	1.0	1.8	2.5	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D =200mA		3.0	5.0	Ω
		V _{GS} = 4.5V, I _D =200mA		3.5	5.5	
Diode Forward Voltage	V _{SD}	I _S =200mA, V _{GS} =0V			1.2	V
Maximum Body-Diode Continuous Current	I _S				200	mA
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{DS} =50V, V _{GS} =0V, f=1MHZ		32		pF
Output Capacitance	C _{oss}			10		
Reverse Transfer Capacitance	C _{rss}			7		
Switching Parameters						
Total Gate Charge	Q _g	V _{GS} =10V, V _{DS} =50V, I _D =0.2A		1.61		nC
Turn-on Delay Time	t _{D(on)}	V _{GS} =10V, V _{DD} =50V, I _D =0.2A, R _{GEN} =6Ω		1.8		ns
Turn-on Rise Time	t _r			9.2		
Turn-off Delay Time	t _{D(off)}			17.5		
Turn-off fall Time	t _f			7.6		

A. Pulse Test: Pulse Width≤300us, Duty cycle ≤2%.

B. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.

■ Typical Performance Characteristics

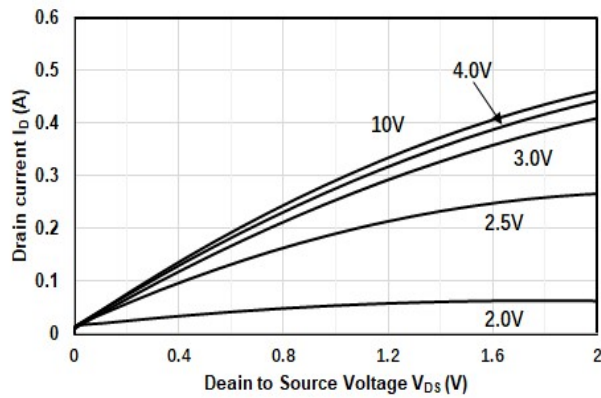


Figure1. Output Characteristics

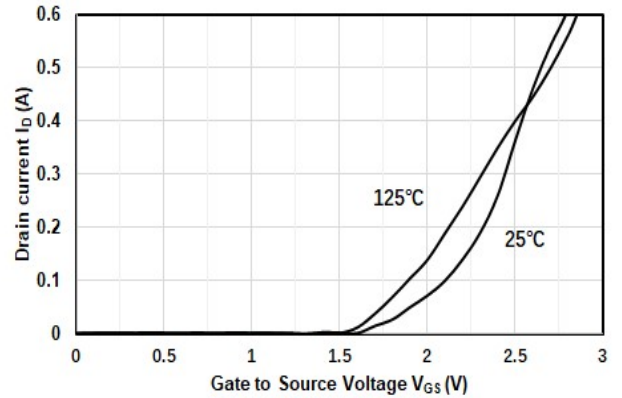


Figure2. Transfer Characteristics

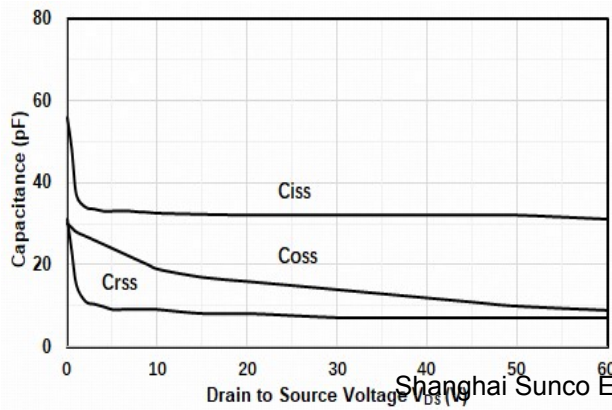


Figure3. Capacitance Characteristics

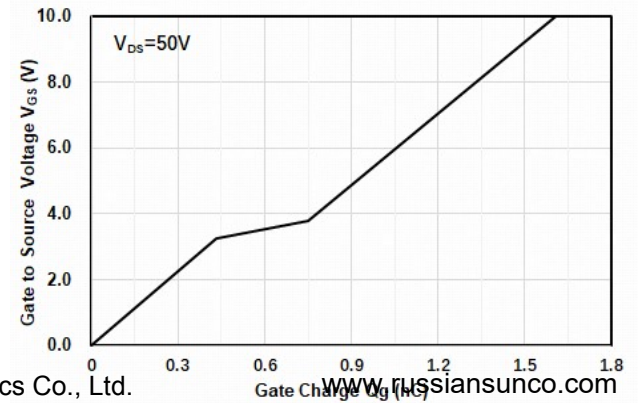


Figure4. Gate Charge

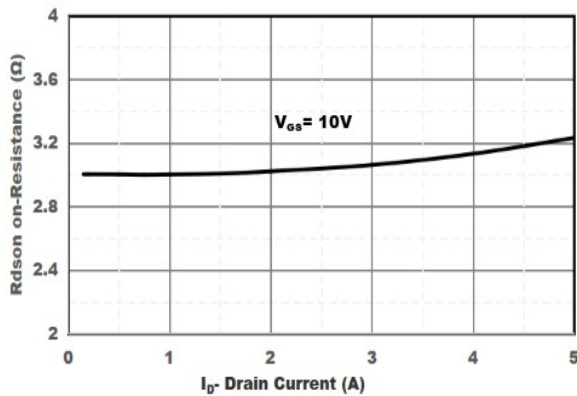


Figure5. Drain-Source on Resistance

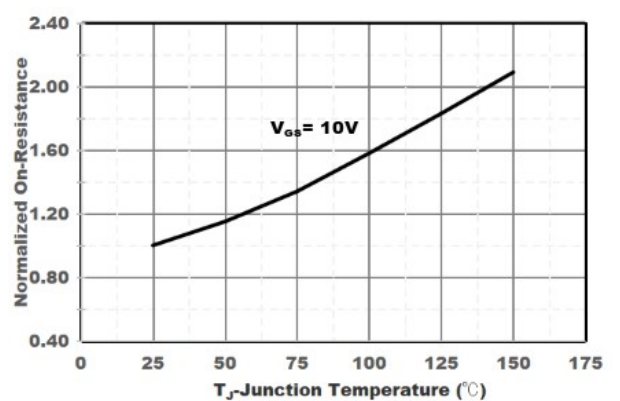


Figure6. Drain-Source on Resistance

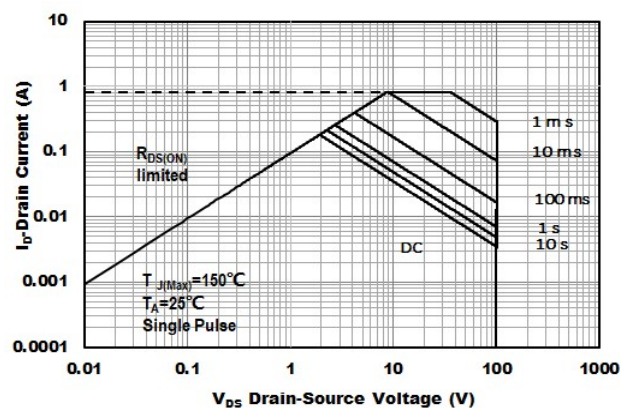


Figure7. Safe Operation Area



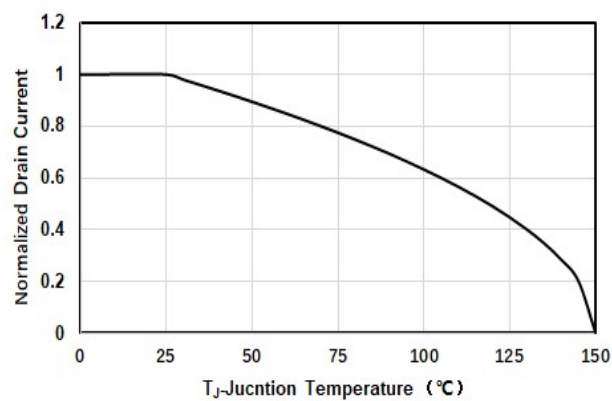


Figure8. Drain-Source Current


■ SOT-323 Package Information




TOP VIEW



SIDE VIEW



SIDE VIEW



SUGGESTED SOLDER PAD LAYOUT

SYMBOL	DIMENSIONS			DIMENSIONS		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.035	---	0.043	0.900	---	1.100
A1	0.000	---	0.004	0.000	---	0.100
A2	0.035	0.037	0.039	0.900	0.950	1.000
b	0.006	0.012	0.016	0.150	0.300	0.400
c	0.004	---	0.010	0.100	---	0.250
D	0.071	0.079	0.087	1.800	2.000	2.200
E	0.045	0.049	0.053	1.150	1.250	1.350
E1	0.085	0.091	0.096	2.150	2.300	2.450
e	0.026TYP			0.650TYP		
e1	0.047	0.051	0.055	1.200	1.300	1.400
L	0.021REF			0.525REF		
L1	0.010	0.014	0.018	0.260	0.360	0.460
θ	0°	---	8°	0°	---	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.russiansunco.com> , or consult your nearest russiansunco's sales office for further assistance.