


BAS70L2

Small Signal Schottky Diode

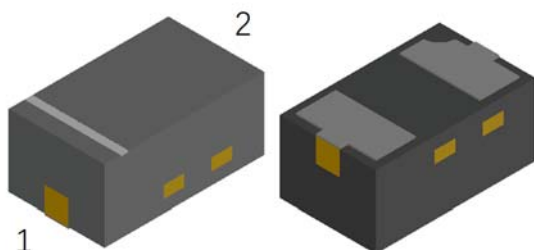

Features

- Moisture sensitivity level 3
- Reverse voltage: 70V
- Average forward current: 200mA

Application

- High frequency and low voltage rectifier

Mechanical data

- **Package:** DFN1006-2L
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Parameter	Symbol	Unit	Value
Device marking code			73
Repetitive peak reverse voltage	V_{RRM}	V	70
Forward current	I_F	mA	70
Non-repetitive surge peak forward current @ $t=8.3\text{ms}$ half-sine wave	I_{FSM}	A	0.1
Non-repetitive surge peak forward current @ $t=1\text{ms}$ square wave			0.1
Power dissipation	P_D	mW	150
Junction temperature	T_J	$^{\circ}\text{C}$	-55 to +125
Storage temperature	T_{STG}	$^{\circ}\text{C}$	-55 to +150

BAS70L2

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

Parameter	Symbol	Unit	Conditions	Min	Typ	Max
Reverse voltage	V _R	V	I _R =10uA	70		
Forward voltage	V _{F1}	mV	I _F =1mA			410
	V _{F2}	mV	I _F =15mA			1000
Reverse voltage leakage current	I _R	nA	V _R =50V			200
Capacitance	C _j	pF	V _R =1V, f=1MHz			2
Reverse recovery time	T _{rr}	ns	I _F =I _R =10mA, I _{rr} =0.1*I _R , R _L =100Ω			5

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R _{θJ-A} ⁽¹⁾	°C/W	667
Thermal resistance, junction-to-case	R _{θJ-C} ⁽¹⁾	°C/W	534

Note:

(1) Thermal resistance from junction to ambient and from junction to case mounted on P.C.B. with 17mm*10mm copper pad areas

BAS70L2

■ Characteristics

Fig 1: P_D -Ta Curve

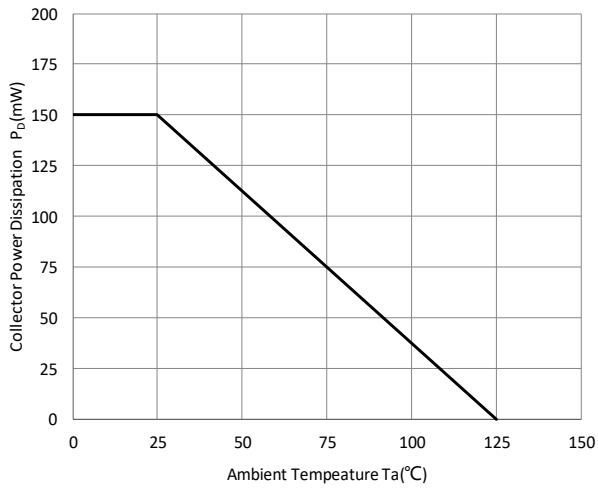


Fig 2: Capacitance Capability

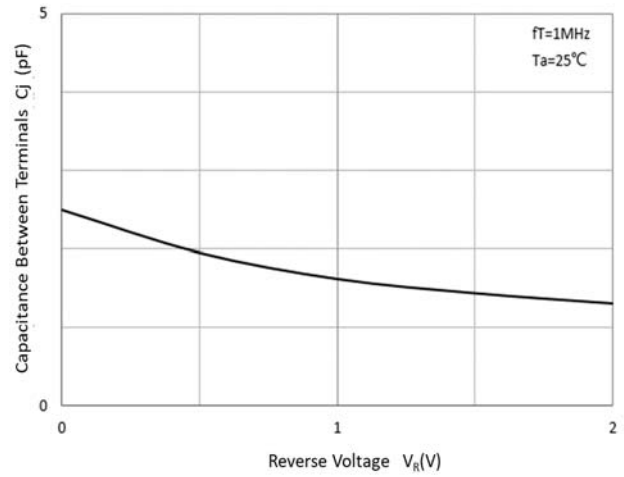


Fig 3: Typical Forward Characteristics


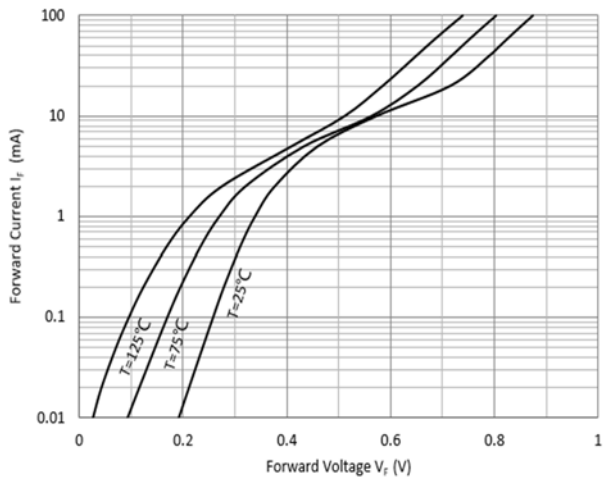


Fig 4: Typical Reverse Characteristics

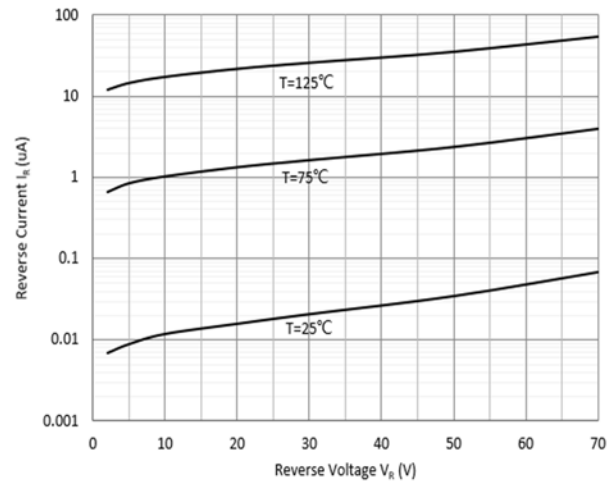


BAS70L2

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BAS70L2	F1	Approximate 0.9	10000	100000	400000	Tape & Reel

■ Outline Dimensions

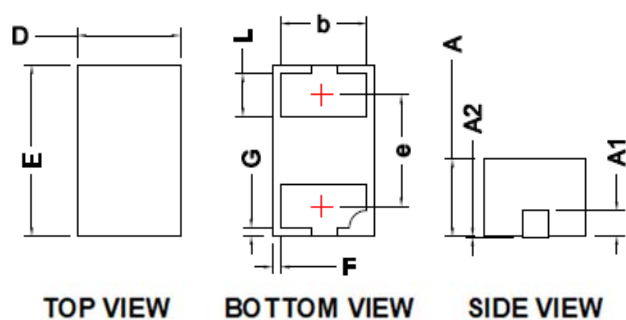

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	0.50	0.60	0.70
E	0.90	1.00	1.10
A	0.35	0.45	0.55
A1	0.15 BSC		
A2			0.10
F	0.005		
G	0.005		
L	0.15	0.25	0.35
b	0.41	0.50	0.59
e	0.65 BSC		

■ Suggested Pad Layout



BAS70L2

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.