


NPN General Purpose Amplifier transistors

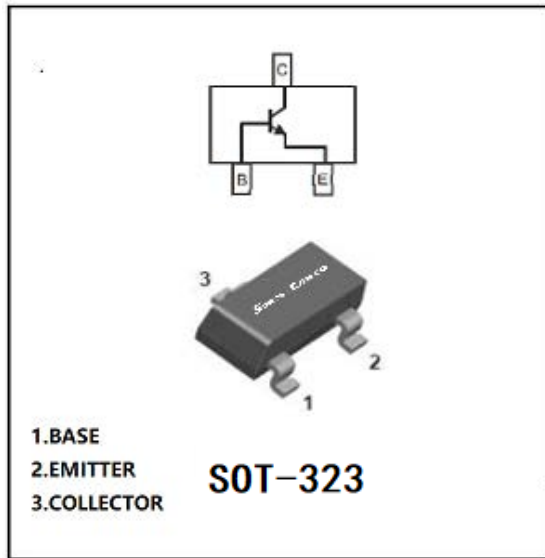

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion

Mechanical Data

- **Package:** SOT-323
Molding compound meets UL 94 V-0 flammability rating, -compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:**

MMSTA05	1H
MMSTA06	1GM

■Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO} MMSTA05 MMSTA06	60 80	V
Collector-Emitter Voltage	V_{CEO} MMSTA05 MMSTA06	60 80	V
Emitter-Base Voltage	V_{EBO}	4	V
Collector Current	I_C	500	mA
Collector Power Dissipation	P_C	200	mW
Operation Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 to +150	°C

MMSTA05 THRU MMSTA06

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Max
Collector-base breakdown voltage	V _{CBO}	V	IC=100μA, IE=0 MMSTA05 MMSTA06	60 80	
Collector-emitter breakdown voltage	V _{CEO}	V	IC =1mA, IB=0 MMSTA05 MMSTA06	60 80	
Emitter-base breakdown voltage	V _{EBO}	V	IE=100μA, IC=0	4	
Collector-base cut-off current	I _{CBO}	nA	VCB=60V, IE=0, MMSTA05 VCB=80V, IE=0, MMSTA06		100 100
Collector-emitter cut-off current	I _{CEO}	nA	VCE=60V, IB=0		100
Emitter-base cut-off current	I _{EBO}	nA	VEB=3V, IC=0		100
DC current gain	h _{FE}		VCE=1V, IC=10mA	100	400
	h _{FE}		VCE=1V, IC=100mA	100	
Collector-emitter saturation voltage	V _{CE(sat)}	V	IC=100mA, IB=10mA		0.25
Base-emitter saturation voltage	V _{BE(sat)}	V	IC=100mA, IB=10mA		1.2

■Other Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Max
Transition frequency	F _t	MHz	VCE=2V, IC=10mA, f=100MHz	100	


■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMSTA05 MMSTA06	F2	Approximate 0.005	3000	30000	120000	7" reel


MMSTA05 THRU MMSTA06

■ Characteristics(Typical)


Static Characteristic

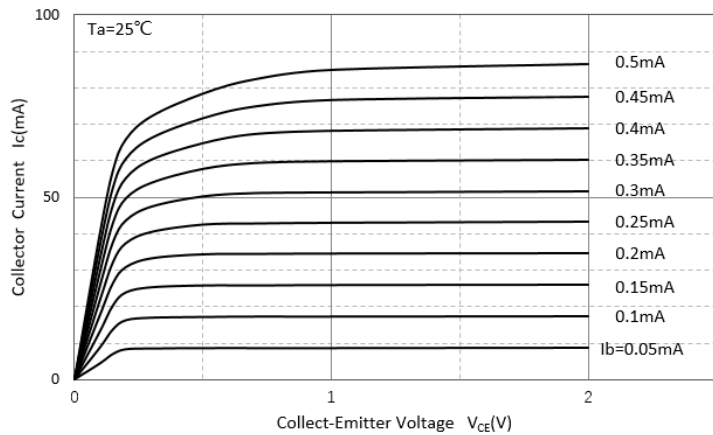


DC Current Gain

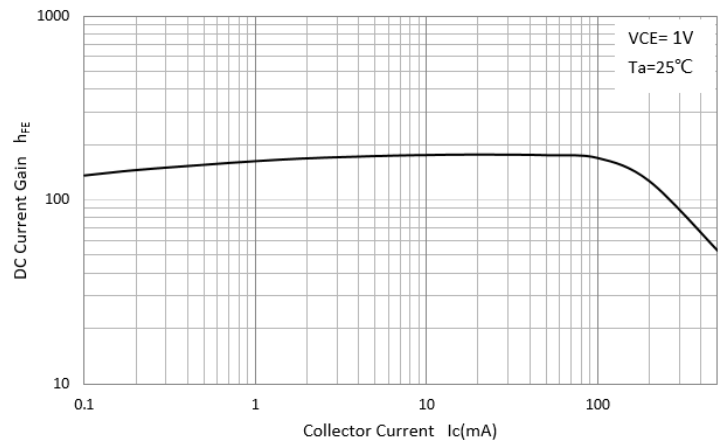


Collector-Emittor Saturation Voltage

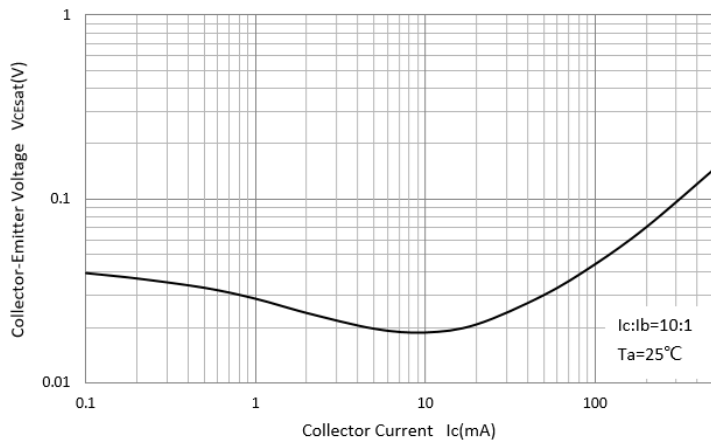


Base-Emittor Saturation Voltage

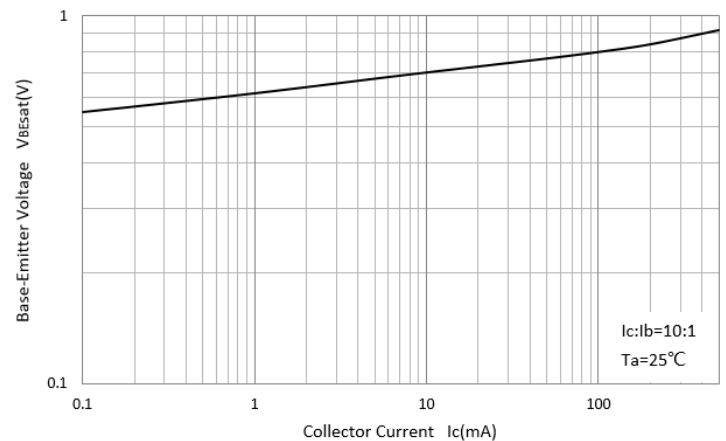

Base-Emittor On Voltage

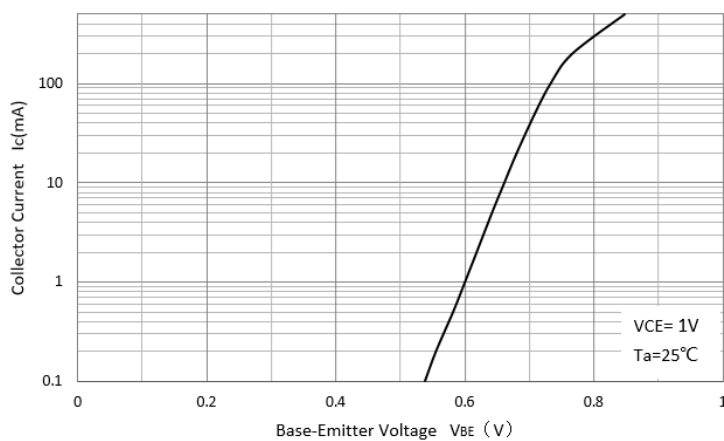


$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

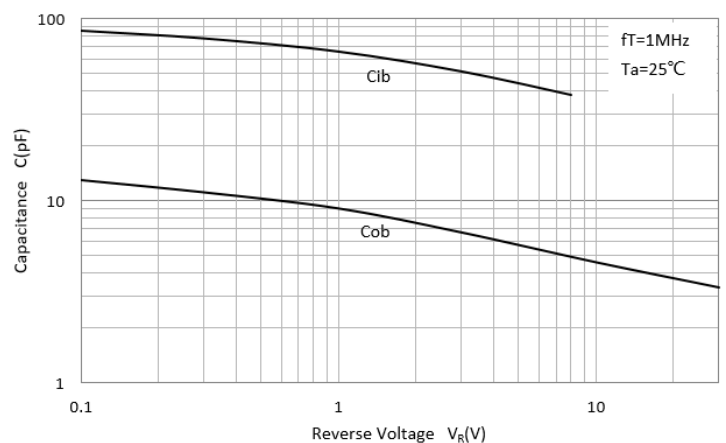


MMSTA05 THRU MMSTA06

■ SOT-323 Package Outline Dimensions

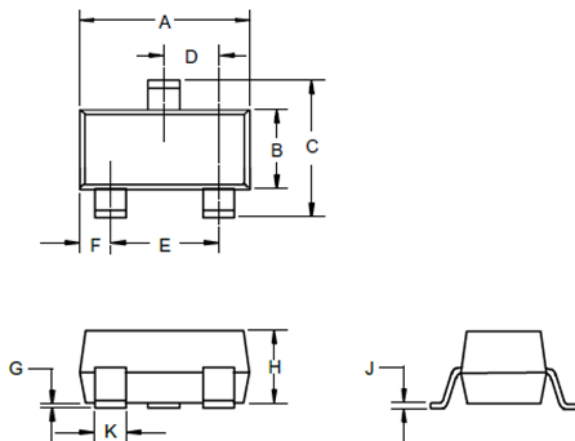

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

■ SOT-323 Soldering Footprint

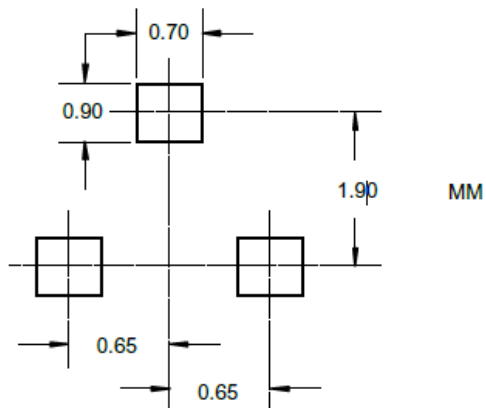

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.