

ZP960- RECTIFIER DIODE


Shanghai Sunco Electronics Co., Ltd.

6600-7200V ^{RRM}

GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 7000 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

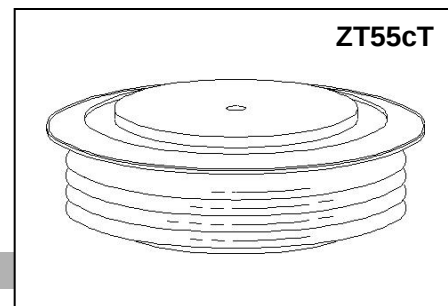

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

Device Type	V_{RRM} (1)	V_{RSM} (1)
ZP960-66	6600	6800
ZP960-68	6800	7000
ZP960-70	7000	7200
ZP960-72	7200	7400

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage	I_{RRM}	5 mA 70 mA (3)
---------------------------------	-----------	-------------------

Notes:


All ratings are specified for $T_j = 25^\circ\text{C}$ unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range 0 to $+150^\circ\text{C}$.

(2) 10 msec. max. pulse width

(3) Maximum value for $T_j = 150^\circ\text{C}$.

(4) See parameter definition below:

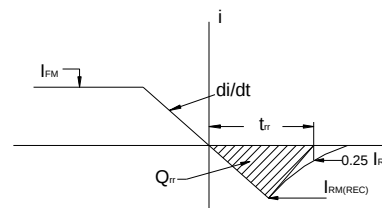

REVERSE RECOVERY CHARACTERIST

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	$I_{F(AV)}$		960		A	Sinewave, 180° , $T_c = 100^\circ\text{C}$
RMS forward current	I_{FRMS}		1507		A	Nominal value
Peak one cycle surge (non repetitive) current	I_{FSM}		14400		A	10 msec (50Hz), sinusoidal wave-shape, 180° conduction, $T_j = 150^\circ\text{C}$
I square t	I^2t		1×10^6		A^2s	10 msec
Peak forward voltage	V_{FM}		1.75		V	$I_{FM} = 1500\text{A}$; $T_j = 25^\circ\text{C}$
Threshold voltage	V_{FO}		1.05		V	$T_j = 150^\circ\text{C}$, $I = 0.5 \pi I_{F(AV)}$ to $1.5 \pi I_{F(AV)}$
Slope resistance	r_F		0.45		m Ω	$T_j = 150^\circ\text{C}$, $I = 0.5 \pi I_{F(AV)}$ to $1.5 \pi I_{F(AV)}$
Reverse Recovery Current (4)	$I_{RM(REC)}$				A	$I_{FM} = 500\text{A}$; $di/dt = -10\text{A/s}$; T_{jmax}
Reverse Recovery Charge (4)	Q_{rr}			5000	μC	$I_{FM} = 500\text{A}$; $di/dt = -10\text{A/s}$; T_{jmax}
Reverse Recovery Time (4)	t_{rr}				μs	$I_{FM} = 500\text{A}$; $di/dt = -10\text{A/s}$; T_{jmax}

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+150		°C	
Storage temperature	T_{stg}	-40	+150		°C	
Thermal resistance - junction to case	$R_{\theta(j-c)}$		0.022		°C/W	Double sided cooled
Thermal resistance - case to heatsink	$R_{\theta(c-s)}$		0.005		°C/W	Double sided cooled
Mounting force	P	22	27	25	kN	
Weight	W			0.46	kg.	

* Mounting surfaces smooth, flat and greaseless

CASE OUTLINE AND DIMENSIONS