



## N-Channel Enhancement Mode Field Effect Transistor

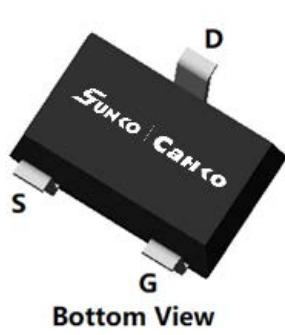

**SOT-323**

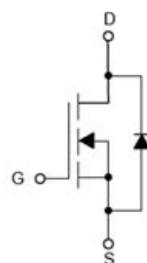

### Product Summary

• $V_{DS}$	50V
• $I_D$	340mA
• $R_{DS(ON)}$ (at $V_{GS}=10V$ )	<1100mΩ
• $R_{DS(ON)}$ (at $V_{GS}=4.5V$ )	<1200mΩ

### General Description

- Trench Power MV MOSFET technology
- Voltage controlled small signal switch
- Low input Capacitance
- Fast Switching Speed
- Low Input / Output Leakage
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

### Applications

- Battery operated systems
- Solid-state relays
- Direct logic-level interface: TTL/CMOS

### ■ Absolute Maximum Ratings ( $T_A=25^\circ C$ unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-source Voltage		$V_{DS}$	50	V
Gate-source Voltage		$V_{GS}$	$\pm 20$	V
Drain Current	$T_A=25^\circ C$	$I_D$	340	mA
	$T_A=100^\circ C$		215	
Pulsed Drain Current <sup>A</sup>		$I_{DM}$	2.2	A
Total Power Dissipation <sup>B</sup>	$T_A=25^\circ C$	$P_D$	250	mW
	$T_A=100^\circ C$		100	
Junction and Storage Temperature Range		$T_J, T_{STG}$	-55~+150	°C

### ■ Thermal resistance

Parameter		Symbol	Typ	Max	Units
Thermal Resistance Junction-to-Ambient <sup>C</sup>	Steady-State	$R_{\theta JA}$	400	500	°C/W

### ■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BSS138BW	F2	138B.	3000	30000	120000	7" reel

■ Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
<b>Static Parameter</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	50	-	-	V
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{DS}}=50\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	$\mu\text{A}$
		$V_{\text{DS}}=50\text{V}, V_{\text{GS}}=0\text{V}, T_J=150^\circ\text{C}$	-	-	100	
Gate-Body Leakage Current	$I_{\text{GSS}}$	$V_{\text{GS}}= \pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	nA
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	0.8	1.2	1.6	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=300\text{mA}$	-	680	1100	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=200\text{mA}$	-	750	1200	
Diode Forward Voltage	$V_{\text{SD}}$	$I_{\text{S}}=300\text{mA}, V_{\text{GS}}=0\text{V}$	-	-	1.2	V
Gate resistance	$R_{\text{G}}$	$f=1\text{MHz}$	-	18	-	$\Omega$
Maximum Body-Diode Continuous Current	$I_{\text{S}}$		-	-	340	mA
<b>Dynamic Parameters</b>						
Input Capacitance	$C_{\text{iss}}$	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$	-	39	-	$\text{pF}$
Output Capacitance	$C_{\text{oss}}$		-	5.7	-	
Reverse Transfer Capacitance	$C_{\text{rss}}$		-	3.3	-	
<b>Switching Parameters</b>		Shanghai Sunco Electronics Co., Ltd.			<a href="http://www.russiansunco.com">www.russiansunco.com</a>	
Total Gate Charge	$Q_{\text{g}}$	$V_{\text{GS}}=10\text{V}, V_{\text{DS}}=25\text{V}, I_{\text{D}}=1\text{A}$	-	1.8	-	$\text{nC}$
Gate-Source Charge	$Q_{\text{gs}}$		-	0.49	-	
Gate-Drain Charge	$Q_{\text{gd}}$		-	0.26	-	
Reverse Recovery Charge	$Q_{\text{rr}}$	$I_{\text{F}}=1\text{A}, \text{di}/\text{dt}=100\text{A/us}$	-	4	-	$\text{nC}$
Reverse Recovery Time	$t_{\text{rr}}$		-	14	-	$\text{ns}$
Turn-on Delay Time	$t_{\text{D}(\text{on})}$		-	3	-	$\text{ns}$
Turn-on Rise Time	$t_{\text{r}}$	$V_{\text{GS}}=10\text{V}, V_{\text{DD}}=25\text{V}, I_{\text{D}}=1\text{A}$ $R_{\text{GEN}}=3\Omega$	-	19	-	
Turn-off Delay Time	$t_{\text{D}(\text{off})}$		-	5	-	
Turn-off fall Time	$t_{\text{f}}$		-	23	-	

- A. Repetitive rating; pulse width limited by max. junction temperature.  
 B.  $P_d$  is based on max. junction temperature, using junction-case thermal resistance.  
 C. The value of  $R_{\text{GJA}}$  is measured with the device mounted on 1 in<sup>2</sup> FR-4 board with 2oz. Copper, in the still air environment with  $T_A=25^\circ\text{C}$ . The maximum allowed junction temperature of  $150^\circ\text{C}$ . The value in any given application depends on the user's specific board design.

### ■ Typical Electrical and Thermal Characteristics Diagrams

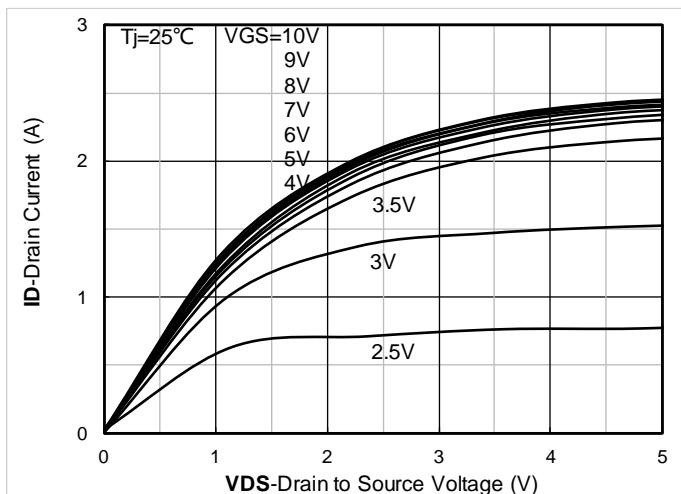


Figure 1. Output Characteristics

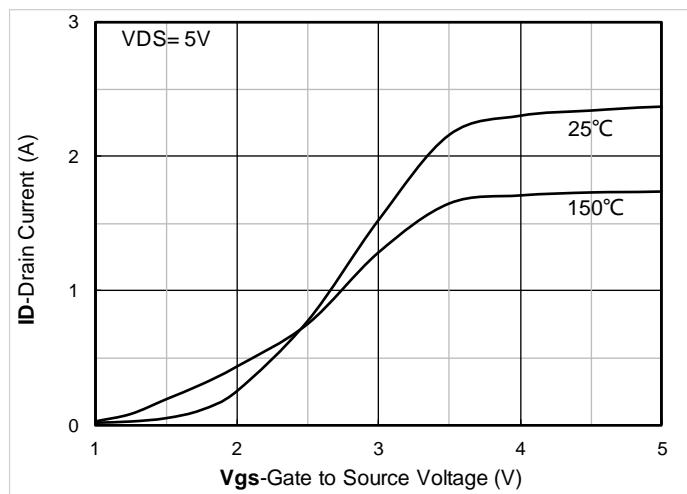


Figure 2. Transfer Characteristics

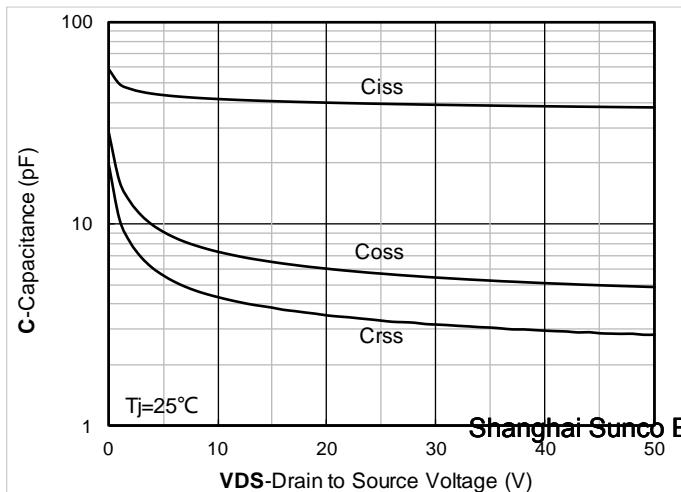


Figure 3. Capacitance Characteristics

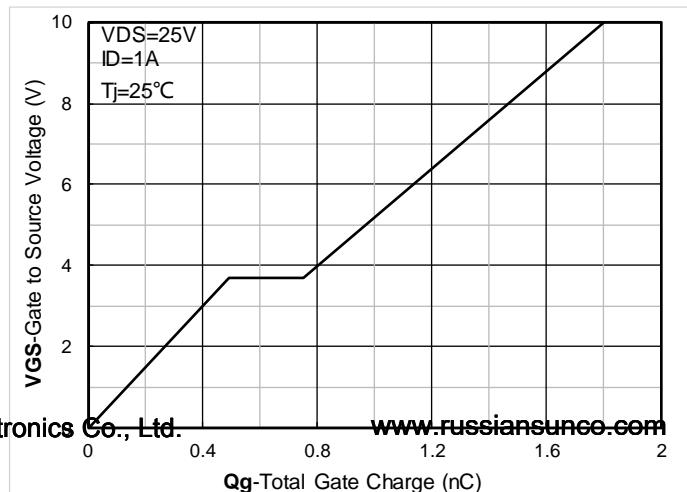


Figure 4. Gate Charge

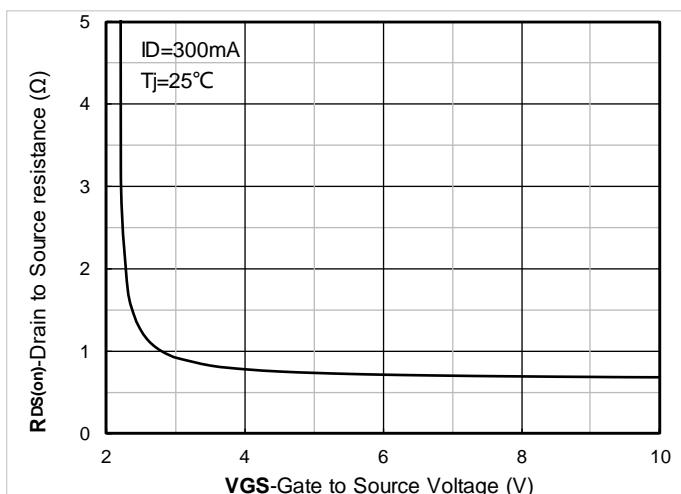


Figure 5. On-Resistance vs Gate to Source Voltage

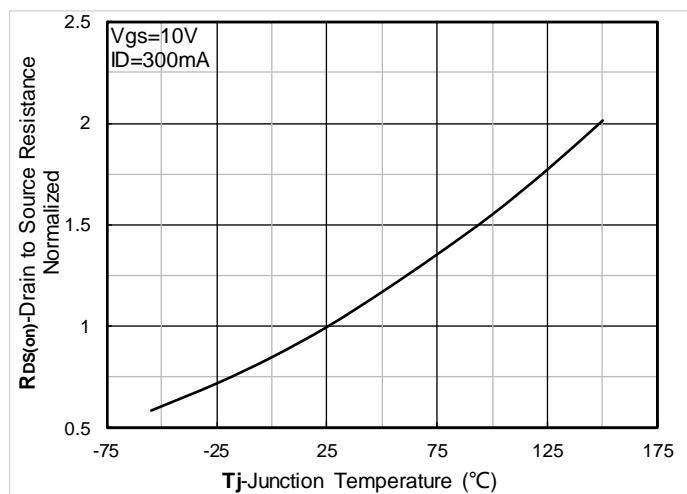


Figure 6. Normalized On-Resistance

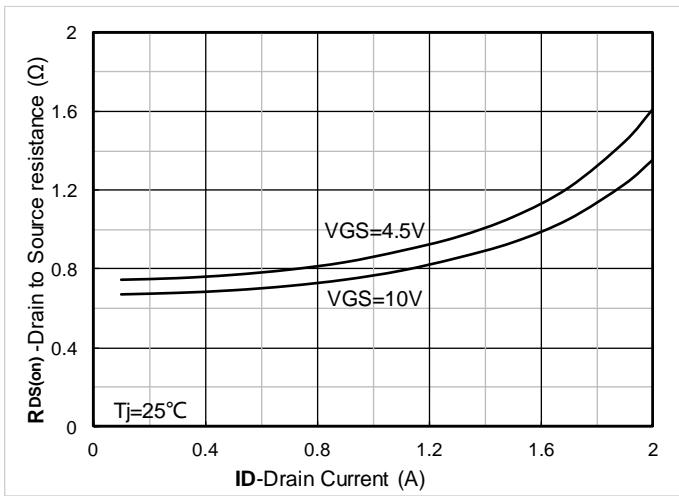


Figure 7. RDS(on) VS Drain Current

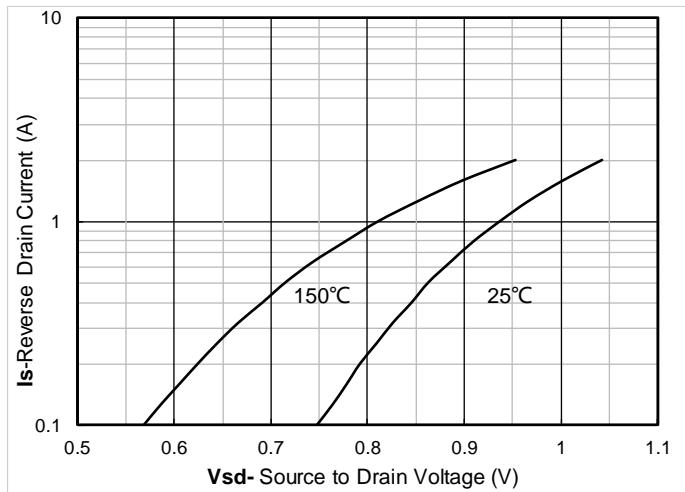


Figure 8. Forward characteristics of reverse diode

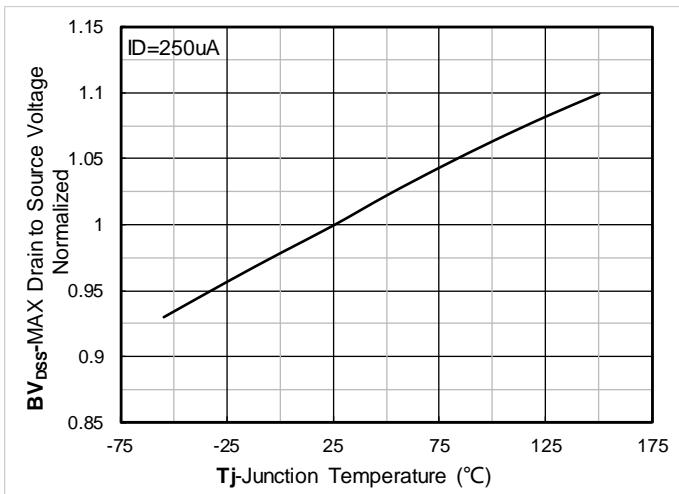


Figure 9. Normalized breakdown voltage

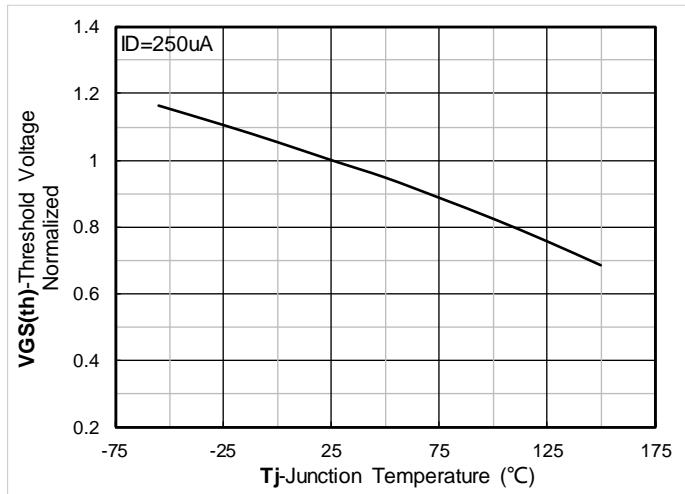


Figure 10. Normalized Threshold voltage

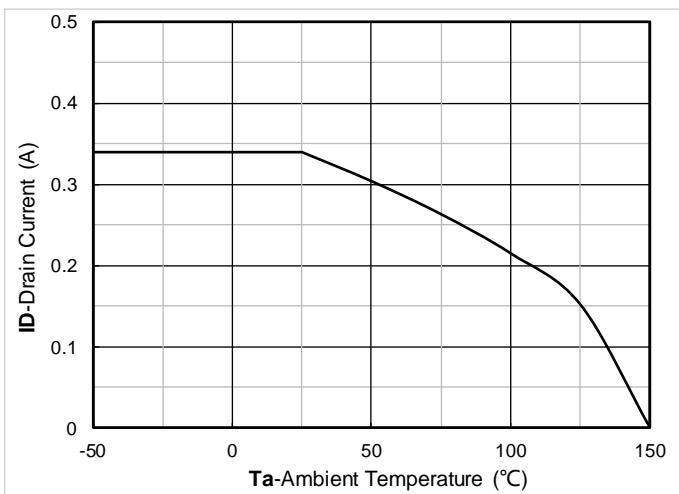


Figure 11. Current dissipation

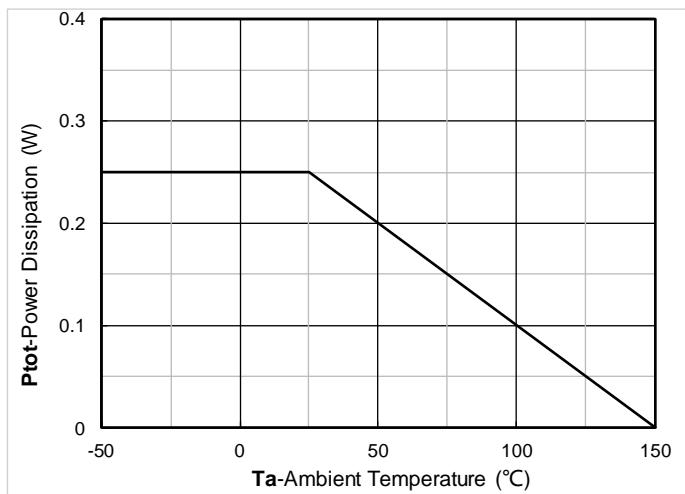


Figure 12. Power dissipation

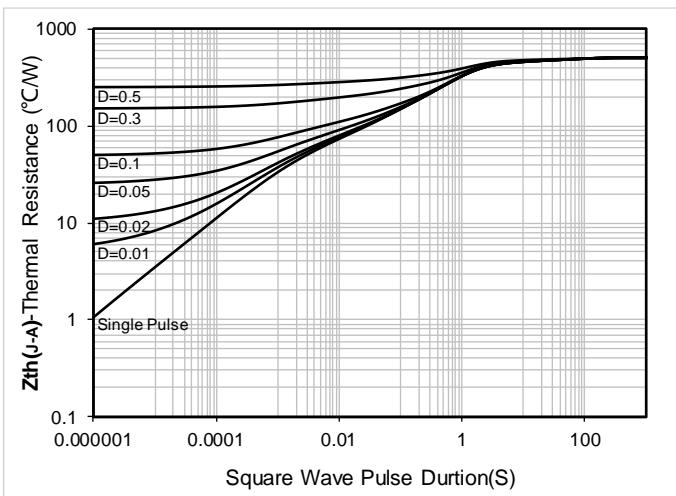


Figure 13. Maximum Transient Thermal Impedance

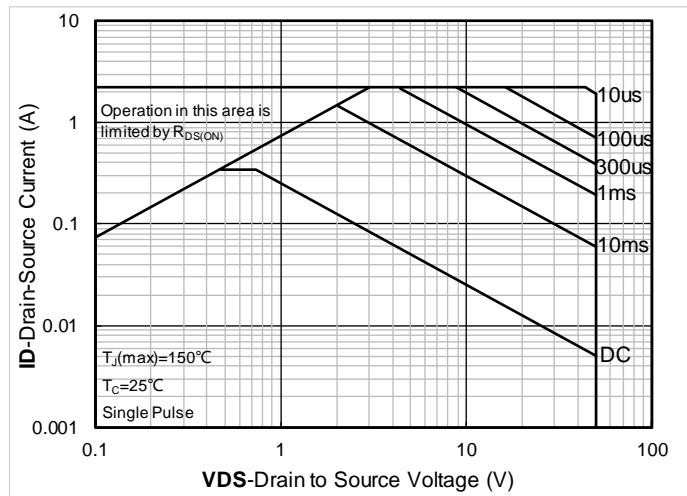


Figure 14. Safe Operation Area

## ■ Test Circuits & Waveforms

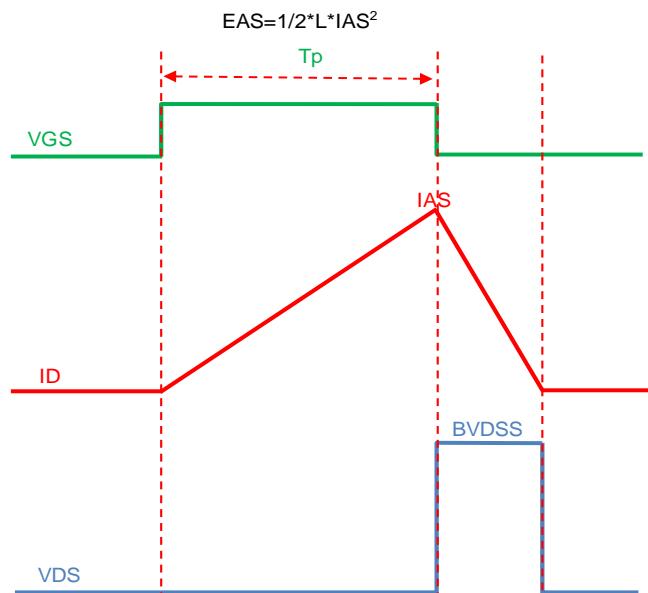
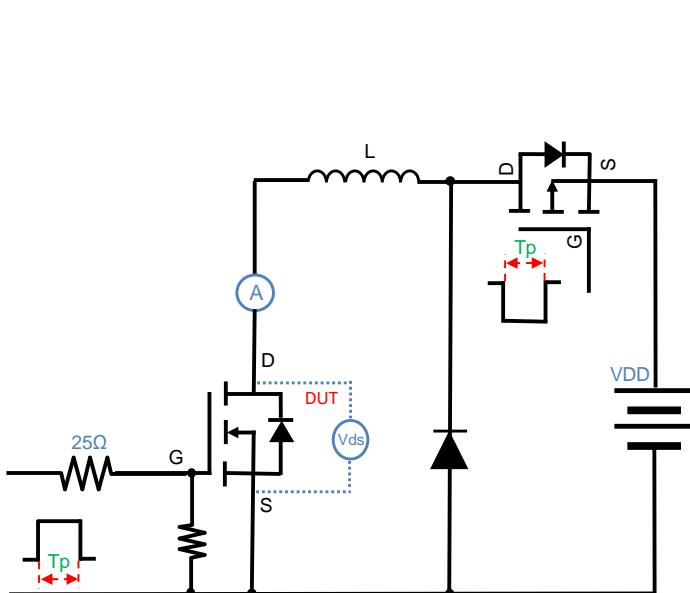


Figure A. Unclamped Inductive Switching (UIS) Test Circuit &amp; Waveform

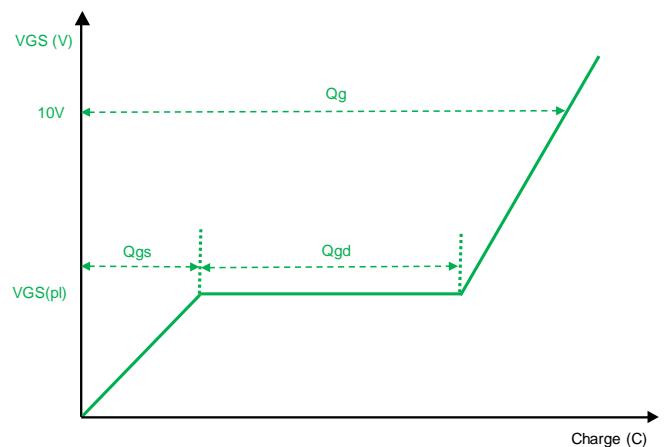
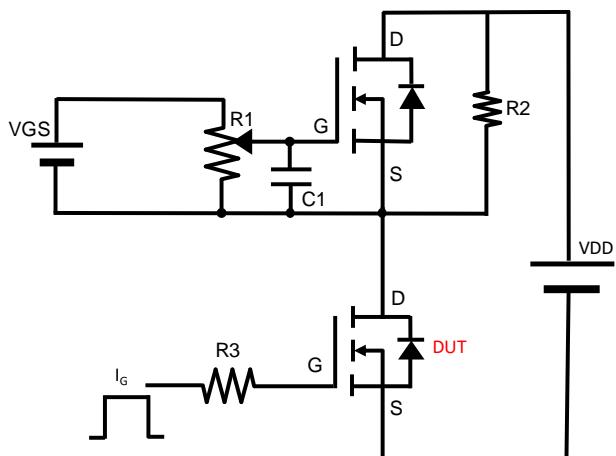


Figure B. Gate Charge Test Circuit &amp; Waveform

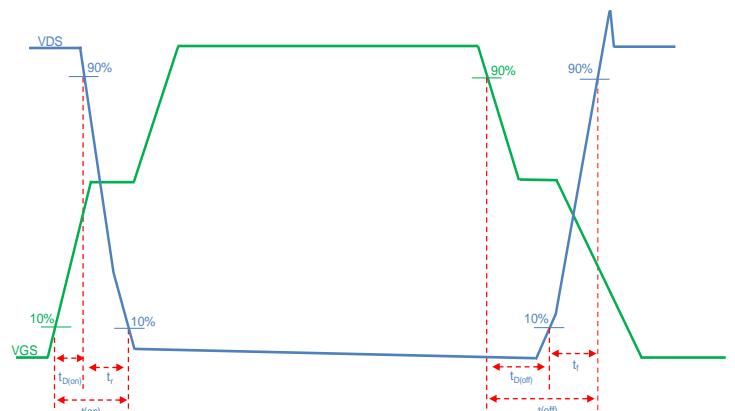
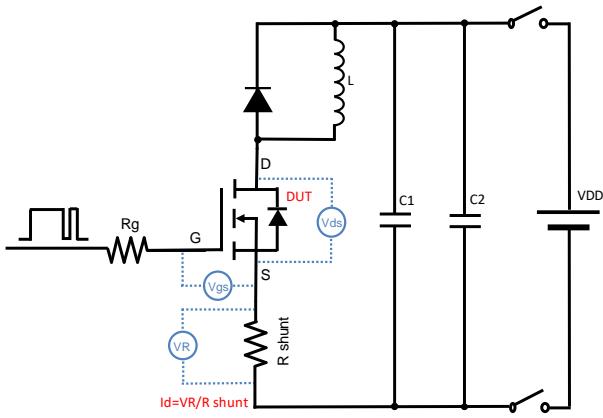


Figure C. Resistive Switching Test Circuit &amp; Waveform






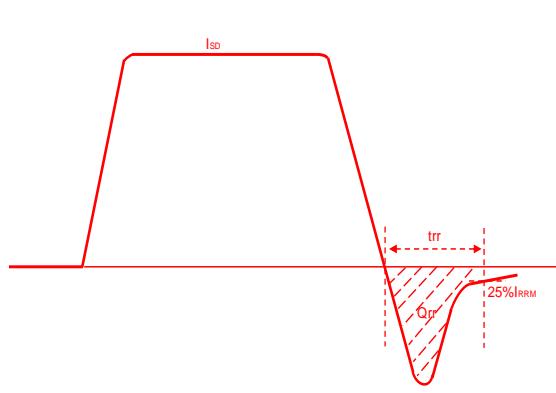


Figure D. Diode Recovery Test Circuit &amp; Waveform

## ■ SOT-323 Package information

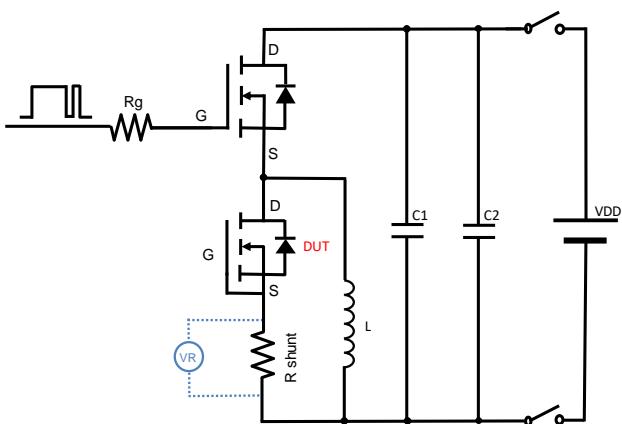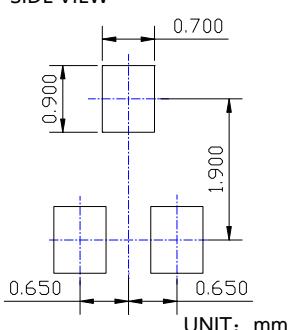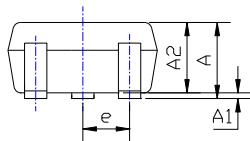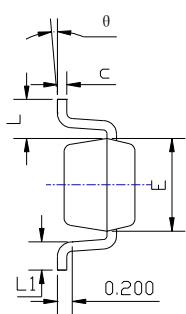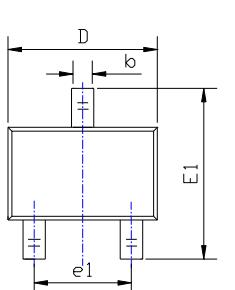

SUGGESTED SOLDER PAD LAYOUT

SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
A2	0.035	0.039	0.900	1.000
b	0.006	0.016	0.150	0.400
c	0.004	0.010	0.100	0.250
D	0.071	0.087	1.800	2.200
E	0.045	0.053	1.150	1.350
E1	0.085	0.096	2.150	2.450
e	0.026TYP		0.650TYP	
e1	0.047	0.055	1.200	1.400
L	0.021REF		0.525REF	
L1	0.010	0.018	0.260	0.460
θ	0°	8°	0°	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

**Disclaimer**

The information presented in this document is for reference only. ussiansunco Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), ussiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.russiansunco.com>, or consult your nearest ussiansunco's sales office for further assistance.